


GHA8000E



GHA8000E

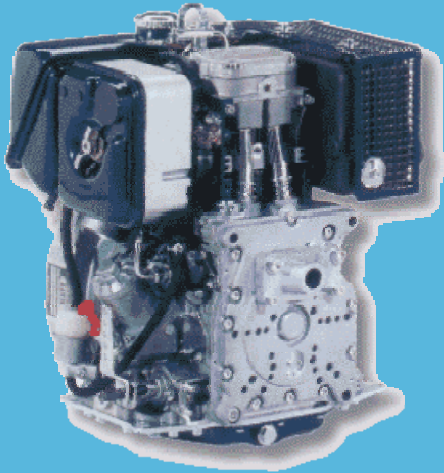

PORTABLE POWER



### Technical

<b>Model</b>	GHA8000E
<b>Type</b>	Portable
<b>Speed</b>	3000 RPM
<b>Phase/Voltage</b>	1/240
<b>Frequency</b>	50 Hz
<b>Output power kW</b>	7.2kW
<b>Output kVA</b>	9.0kVA
<b>Noise Level (dBA @ 7m)</b>	81
<b>Frame</b>	Fuel Tank Base with Roll over Frame

### Engine

<b>Manufacturer</b>	Hatz
<b>Engine Model</b>	ID90Z '108E'
<b>Type</b>	Four Stroke
<b>Starting</b>	Key Start Electric start
<b>Fuel</b>	Diesel
<b>Run Time</b>	16 hr @ 75%
<b>Consumption</b>	3.1 L/h @75%
<b>Tank Capacity</b>	50 L
<b>HP 3000 rpm max</b>	15.6
<b>Cubic Capacity</b>	0.722 L
<b>Oil Capacity</b>	1.9 L

### Alternator

<b>Alternator Brand</b>	Meccalte
<b>Type</b>	Brushless
<b>Harmonic Distortion</b>	Less than 5%
<b>Protection Class</b>	IP 23
<b>Insulation Class</b>	Class H

### Outlets

<b>Outlet</b>	2 x 15amp switched with thermal overload
---------------	--

### Dimensions & Weight

<b>Length</b>	105 Cm
<b>Width</b>	55 Cm
<b>Height</b>	70 Cm
<b>Weight</b>	180 Kg

### Options

<b>Outlets</b>	Weather protected IP33 & Weatherproof IP66
<b>Protection</b>	RCD/ELCB IP30 or IP66
<b>Wheel kits</b>	Four wheel
<b>Controls</b>	Remote Start, AMF
<b>Alternators</b>	Oversized, Single or Three Phase