

OzPOWER

POWER EQUIPMENT



OzPower 15kVA S-3

Model OGD15 S-3
Speed 1500 RPM
Phase/Voltage 3, 415
Frequency 50 Hz

Stdby Power 17kVA / 13kW
Prime Output 15kVA / 12kW
Fuel Capacity 76 Litres

Length 2.050m
Width 0.850m
Height 1.150m
Weight 890 kg dry

Engine

OEM 1500RPM Watercooled Diesel
Type & Cylinder 4 Stroke – 3 L
Induction Naturally Aspirated

Fuel Consumption

2.9 L @ 100% Load

Coolant Capacity 14.5 L

Governor Mechanical

Oil Capacity 6 L

Alternator

AC Brushless

Rated Output 17kVA

THF Less than 3%

Protection Class IP 23

Insulation Class Class H

Controls

Controller Smart GEN6120 Auto Mains Failure Control

Circuit Breaker Three Pole MCB

Canopy


24 Hour Fuel Tank Base with tie down points

Canopy with Centre lift, lockable doors, emergency stop and control panel viewing window

Heavy duty powder coat finish

IP66 Power Outlets 3 x 15 Amp

1 x 20 Amp 3 Phase

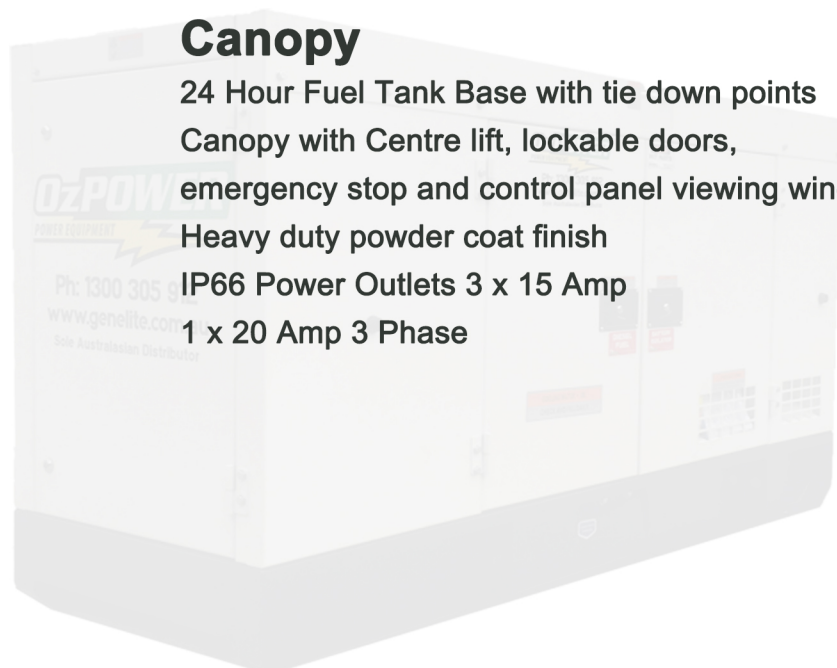

East Coast Head Office Ph. 1300 305 912
Ph. +61 7 3277 8626 Fax. +61 7 3277 8627
24 Perrin Place, Salisbury QLD 4107

West Coast Head Office Ph. 1300 305 912
Ph. +61 8 6305 0145 Fax. +61 8 6305 0219
2/6 Quantum Link, Wangara WA 6065

CALL US
1300 305 912