

OzPOWER

POWER EQUIPMENT



OzPower 23kVA S-3

Model OGD23 S-3
Speed 1500 RPM
Phase/Voltage 3, 415
Frequency 50 Hz

Stdby Power 25kVA / 20kW
Prime Output 23kVA / 18kW
Fuel Capacity 115 Litres

Length 2.035m
Width 0.895m
Height 1.165m
Weight 680 kg dry

Engine

OEM 1500RPM Watercooled Diesel

Type & Cylinder 4 Stroke – 3 L

Induction Naturally Aspirated

Fuel Consumption

4.4 L @ 100% Load

Coolant Capacity 14.5 L

Governor Mechanical

Oil Capacity 6 L

Alternator

AC Brushless

Rated Output 25kVA

THF Less than 3%

Protection Class IP 23

Insulation Class Class H

Controls

Controller DeepSea 4610 Auto Start Control Module and the DSE4620 Auto Mains Failure Control

Circuit Breaker Three Pole MCB


Canopy

24 Hour Fuel Tank Base with tie down points

Canopy with Centre lift, lockable doors, emergency stop and control panel viewing window

Heavy duty powder coat finish

IP66 Power Outlets 3 x 15 Amp

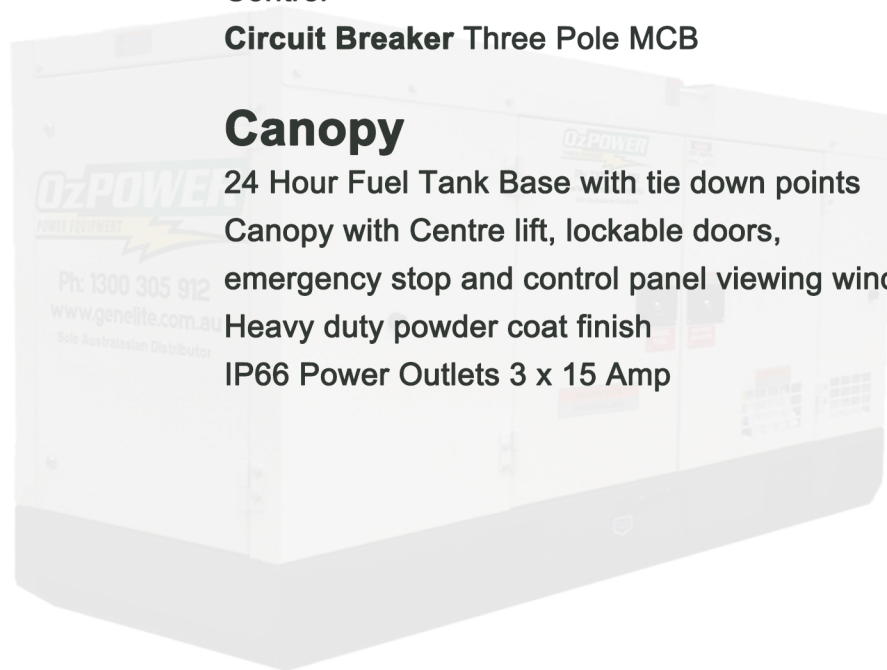

East Coast Head Office Ph. 1300 305 912
Ph. +61 7 3277 8626 Fax. +61 7 3277 8627
24 Perrin Place, Salisbury QLD 4107

West Coast Head Office Ph. 1300 305 912
Ph. +61 8 6305 0145 Fax. +61 8 6305 0219
2/6 Quantum Link, Wangara WA 6065

CALL US
1300 305 912