



Genette



GKM6.6S-1

Model GKM6.6S-1
Type Medium Duty
Speed 1500 RPM
Phase/Voltage 1, 240
Frequency 50 Hz

Stdby Power 7kVA / 5.6kW
Prime Output 6.6kVA / 5.2kW
Noise Level (dBA @ 7m) 59dBA
Fuel Capacity 38 Litres

Length 1.45m
Width 0.64m
Height 0.95m
Weight 526 kg

Engine

Manufacturer Kubota Diesel
Engine Model D905-BG
Type & Cylinder 4 Stroke – 3 L
Induction Naturally Aspirated
Fuel Consumption
1.9 L @ 100%, 1.4 L @ 75%, 0.9 L @ 50% Load
Coolant Capacity 5.0 L
Governor Mechanical
Cubic Capacity 0.898 L
Oil Capacity 5.1 L

Options

Outlets Single Phase
3 x 10amp 3pin IP66 with RCD MCBO
PMG EBS

Controls


Controller Remote Start with Analog Metering
Circuit Breaker Two Pole
Battery isolator Fitted adjacent battery

Alternator

Alternator Brand / Model Mecc Alte ECP28 2VS4A
Type Brushless
Harmonic Distortion Less than 5%
Protection Class IP 23
Insulation Class Class H

Canopy

Canopy Centre Lift, lockable doors with control panel viewing window
Path Finish Heavy duty powder coat finish white canopy with a black base
Emergency Stop External Emergency Stop

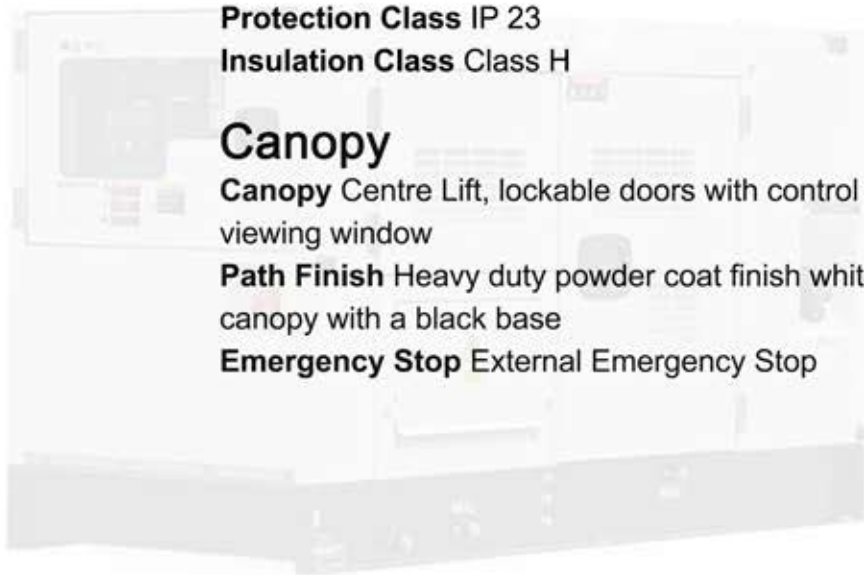

East Coast Head Office Ph. 1300 305 912
Ph. +61 7 3277 8626 Fax. +61 7 3277 8627
24 Perrin Place, Salisbury QLD 4107

West Coast Head Office Ph. 1300 305 912
Ph. +61 8 6305 0145 Fax. +61 8 6305 0219
2/6 Quantum Link, Wangara WA 6065

CALL US
1300 305 912